
A NEW PRODUCT DESIGN BY:

UNDERGROUND SOLUTIONS

Valve Box Percolation Screen

- Keep the interior base of a valve box clean for easy access to the operating nut.
- Tested in the field for over 3 years. It has proven it's effectiveness in the field.
- Proven to decrease field expenses by **80%**.

Installation Instructions:

- Remove 2" operating nut
- Place Percolation Screen, rubber side up
- Replace nut
- Install valve box base
- Align. Then take excess material, fold over extension of V.B. base, then hold in place with tie wrap supplied

NOTE:

This product will also act as a centering ring for your valve box as well.

Engineered with the highest quality material on the market today and most stringent standards in mind.


Using #42 Buna N Blends of RUBBER which are resistant too:

- Oil
- Aromatic & aliphatic hydrocarbons
- Natural gas
- Fogging oil
- Condensates
- Gasoline


Maximum Temp. 150F

Fabric is Heavy Duty ASTM #4355 tested

Gasket is 8" diameter c/w center hole and is 60 duro NRSU Buna Gr. 42 ASTM #D1418

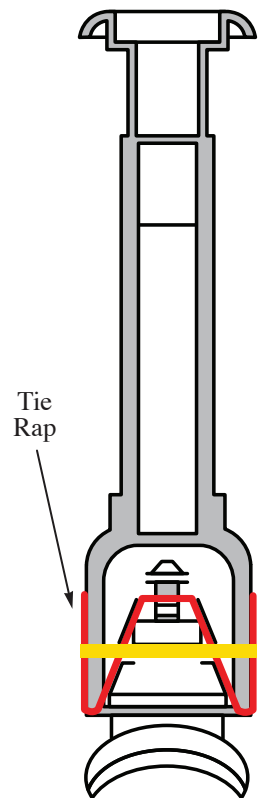

PATENTS PENDING



Underground Solutions

Distributed by SW Services